

External handle

to be used together with Quick-Lift Systems™ Control box

An external handle that, when integrated with Quick-Lift Systems™ control box, meets the highest standards of ergonomics, working environment, safety and efficiency.

Easy to use thanks to an outstanding reaction, regardless of load weight.


Easily accessible buttons for various functions.

Offers a versatile solution for end effectors together with Quick-Lift Systems™ Control box.

Costs effectively reduced through high reliability and durability.



A strong and safe solution for quick and easy handling.

For customized end effectors and to be used together with Quick-Lift Systems™ Control box for mechanical end effectors or Quick-Lift Systems™ Control box with pneumatic 5/2 valve.

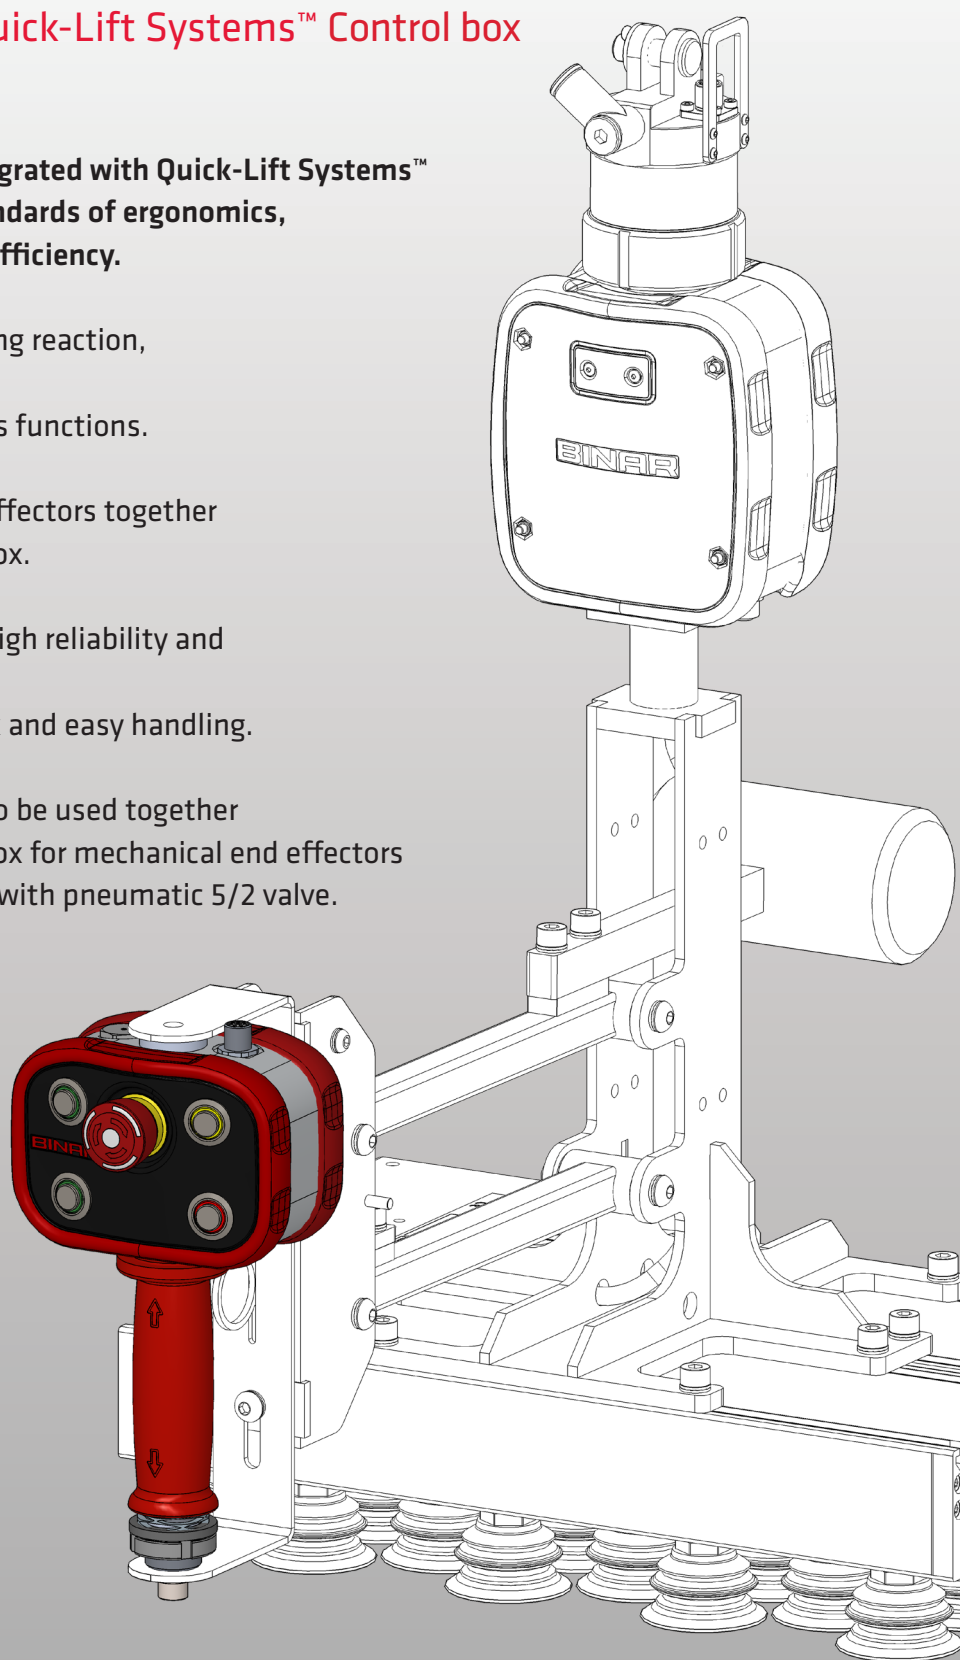

External handle

to be used together with Quick-Lift Systems™ Control box

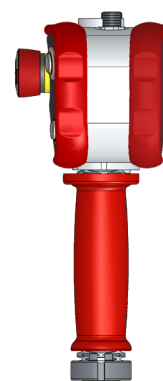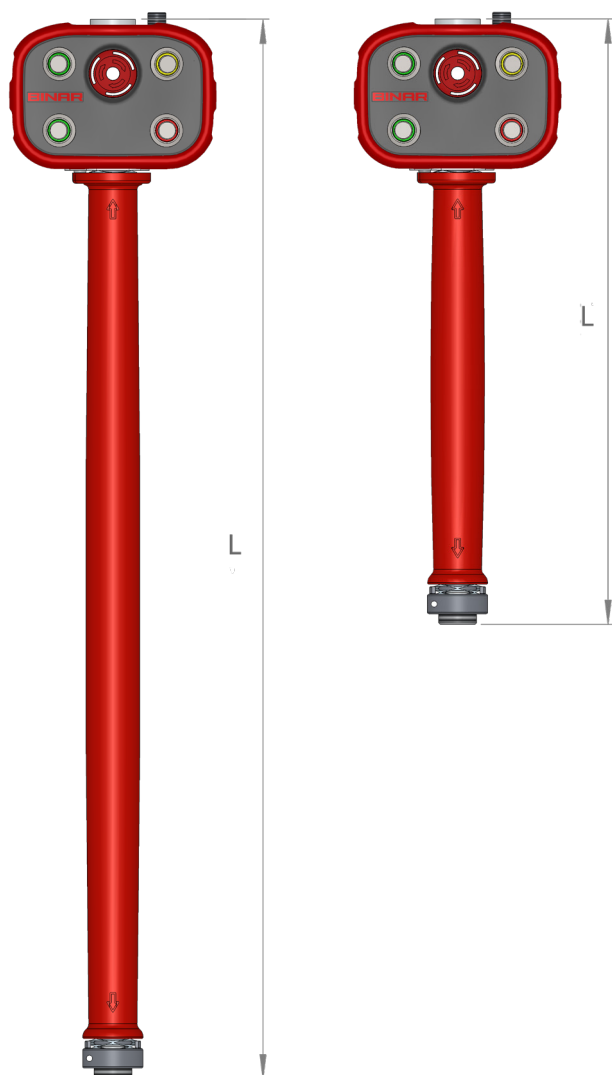


Description	Part.no	Length mm	Weight kg
Standard length	1014100245	L = 245	1,3
Long	1014100400	L = 400	1,7
Extra Long	1014100700	L = 700	2,1

TECHNICAL DATA EXTERNAL HANDLE

Load capacity	max. 300kg / 660 lbs
Safety	High degree of safety is achieved using our intelligent control systems
Button functions	Emergency stop. - Upper left button: For toggling between power save mode and operating mode. - Upper right button: For activating auto balance mode. - Lower buttons: Grip and release functions
Main functions	- Handle mode, a smooth lifting operation is performed when the manoeuvre handle is moved up or down. - Auto balance mode or float mode, the same smooth lifting operation is performed when the operator moves the load it self up or down. - Electronically controlled gripping function that allows grip or release only when the weight of the work load is not affecting the end effector. - The External handle can also be used together with control box for mechanical end effectors (part no 012846). - Automatic power save mode
Other	To be used with Quick-Lift Control box for mechanical end effectors or Control box with pneumatic 5/2 valve

Binar Quick-Lift Systems AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

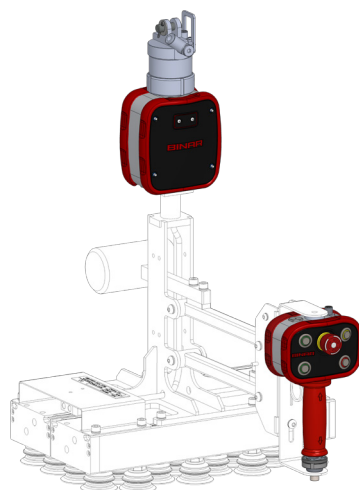

Binar Quick-Lift Systems AB

Box 2014 • SE-461 11 TROLLHÄTTAN • Sweden

telephone: +46 (0)520 47 40 00 • e-mail: info.quicklift@binar.se

www.binarquicklift.com

2019-11-01 EN 3.0

BINAR
Improving your productivity