

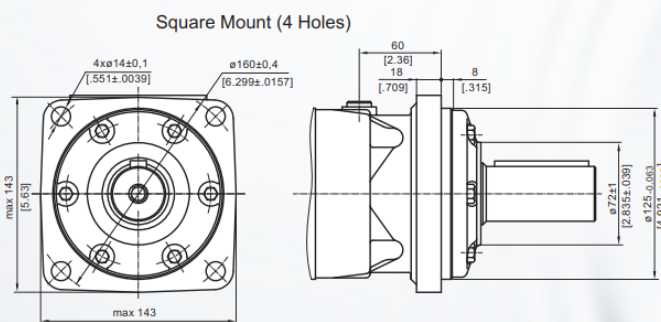


Technical data for MT with 40mm shaft										
Type		MT 160	MT 200	MT 230	MT 250	MT 315	MT 400	MT 500	MT 630	MT 800
Geometric displacement (cm3/rev.)		161.1	201.4	232.5	251.8	326.3	410.9	523.6	629.1	801.8
Max. speed (rpm)	cont.	625	625	536	500	380	305	240	196	154
	int.	780	750	643	600	460	365	285	233	185
Max. torque (Nm)	cont.	470	590	670	730	950	1080	1220	1318	1464
	int.	560	710	821	880	1140	1260	1370	1498	1520
	peak	669	838	958	1036	1346.3	1450.3	1643.8	1618.8	1665
Max. output (KW)	cont.	27.7	34.9	34.7	34.5	34.9	31.2	28.8	25.3	22.2
	int.	32	40	40	40	40	35	35	27.5	26.8
Max. pressure drop (MPa)	cont.	20	20	20	20	20	18	16	14	12.5
	int.	24	24	24	24	24	21	18	16	13
	peak	28	28	28	28	28	24	21	19	16
Max flow (L/min)	cont.	100	125	125	125	125	125	125	125	125
	int.	125	150	150	150	150	150	150	150	150
Max. Inlet pressure (MPa)	cont.	21	21	21	21	21	21	21	21	21
	Int.	25	25	25	25	25	25	25	25	25
	Peak	30	30	30	30	30	30	30	30	30
Weight (kg)		19.5	20	20.4	20.5	21	22	23	24	25

* Peak pressure: Max. value of operating motor in 0.6 second per minute

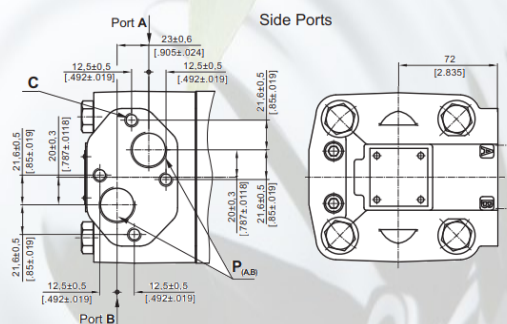

C -ø40 straight, Parallel key A12x8x70 DIN 6885
Max. Torque 132.8 daNm [11755 lb-in]

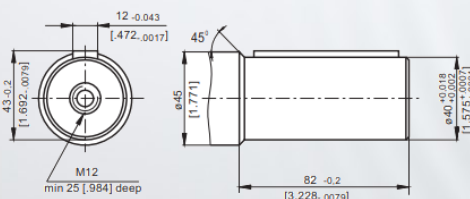

T: G1/4 or M14x1,5 - 12 mm (.47 in) depth (plugged)